


## RACK MOVER

### 7,500 LB WEIGHT CAPACITY


Relocating a fully loaded server rack was once a labor-intensive process requiring a large crew, specialized equipment, and significant risk of error. The Ballymore Rack Mover transforms that reality. This all-in-one, fully powered solution supports servers, power equipment, networking devices, and racks up to 48U, reducing what once demanded a six-person team to a simple two-person operation: one operator and one spotter.

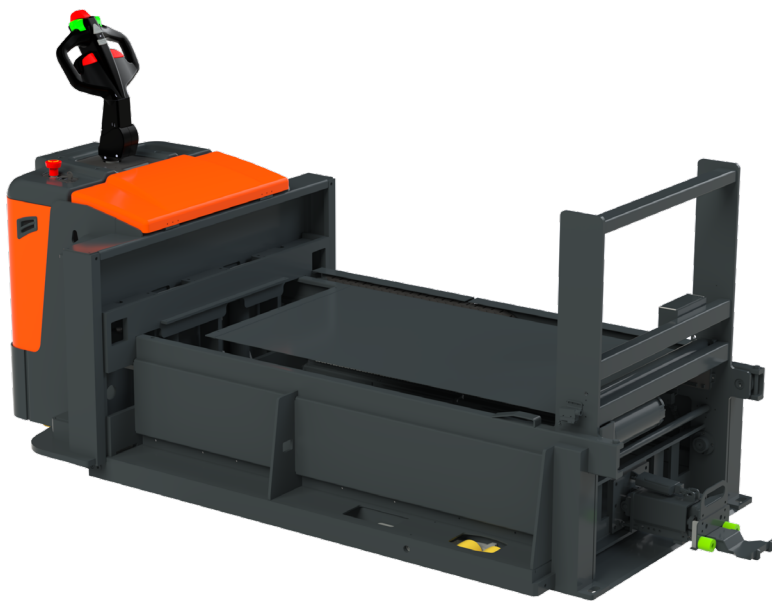

## FEATURES

- Electromechanical push/pull carriage with 60" of travel for controlled rack extraction and placement
- Integrated clamp engages server rack cross-member for secure, stable handling of top-heavy loads
- Locking deck engages collapsible crate locating pins to align and stabilize during loading
- Single tiller handle controls drive direction, speed, and deck raise/lower
- Pendant control operates carriage, clamp, and tilt independently
- Standard and Turtle (reduced speed) modes for precision maneuvering
- Emergency stop button for immediate shutdown
- Lithium-ion battery with opportunity charging
- Battery level indicator on display screen
- Sloped loading edge for smooth rack transition
- Handles server racks up to 48U
- Larger platforms available in the future

## Rack Mover Loading/Unloading Sequence

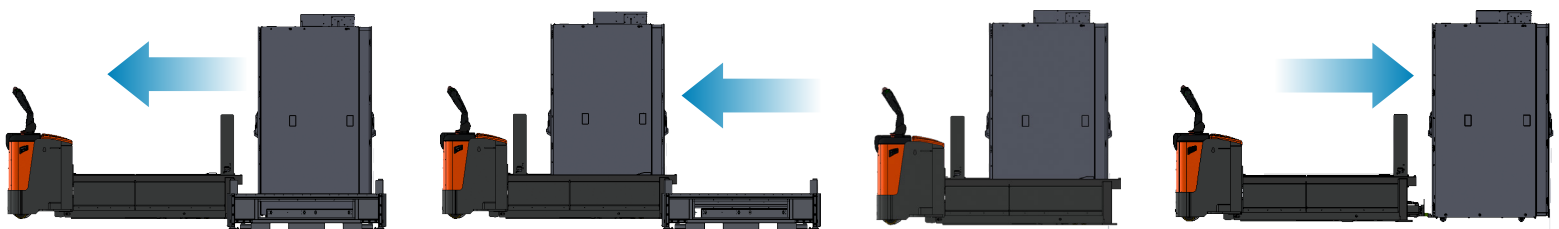

# DIMENSIONS



Load Capacity	lbs	7,500
Overall Length	in	98
Overall Width	in	54
Inside Width	in	33
Overall Height	in	55.73
Platform Size (Usable)	in	31.5 x 53
Lift Height	in	6.8
Push/Pull Thrust	lbs	1,000
Carriage Travel	in	60
Loading Edge Slope	°	2.49
Deck Thickness	in	0.63
Drive Type	-	Powered, tiller-controlled
Battery	-	Lithium-Ion
Charging	-	Opportunity Charging
Operators Required	-	2 (Operator + Spotter)

